




RVM X2 COMBI (PET AND CAN)

Finally, a revolution for small and medium sized volumes. Reliable, fast and also prepared for future packaging forms!

RVM X2 is part of a new generation of reverse vending machines. It is developed on a new technology that is prepared for future challenges. We are proud of and could launch a machine for small and medium volumes where there is not compromised on quality classification / compactor technology. This machine parts Technology their bigger brothers, but is packaged in a compact and cost effective chassis which gives it a perfect fit for small and medium volumes.


- LCD color display makes the message clear to the user.
- Easy cleaning and maintenance.
- Easy installation. Set in place and connect the power and network.
- Separate storage for compacted PET bottles and cans in the cabinet. 800 cans and 400 PET.
- Identification - scanner for bar code reading, shape recognition.
- Modern design - A modern look that attracts customers and high service availability.



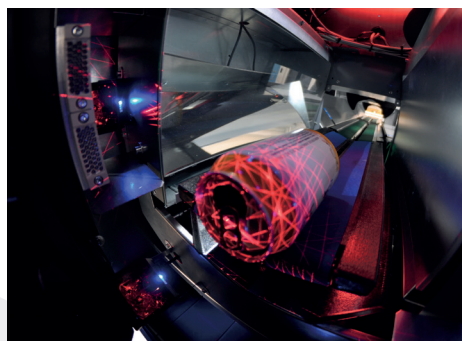

RVM X2, TECHNICAL SPECIFICATIONS

Infeed	Horizontal feed, up to 60 items per minute.
Packaging Type	Upto 3 liter PET and 1 liter can.
Recognition of packaging	3600 barcode reading and video shape detection.
Barcode	EAN-13, EAN-8, UPC-E, UPC-A.
Weight	Elektronic weight.
Control System	PC with Linux operative system.
Communications	LAN interface (Ethernet TCP/IP).
Storage Capacity	Up to 400 pcs 0.5L PET Up to 800 pcs 0.33L can.
Power supply	230V, 10A 1 phase.
Power consuming	Standby: 60W. Operation: 120-900W.
Environment	Temperature: 5-40°C. Relative Humidity: Max 90% - non-condensing.
Warning	Message on the display, selectable tone, SMS or e-mail.
Display	10.4" touch display with backlight.
Printer	Graphic thermo printer for text, logos and barcodes. About 1700 receipts per roll.
Marketing	The touch display and printer can be used for marketing and information. It can show offers, link to own web-sites and you can print-out receipts and shopping list. Donation function to several organizations is also an option.
Monitoring / backoffice	Storage of data occurs in the machine. Event log with detailed information. Status of the reverse vending machine can be displayed on screen and printer. RVM Online, unique proactive monitoring and analysis over network.
Safety and Approvals	EN 60335-1, EN62233, EN61000-6, CE approved in compliance with the directive. Low voltage 2014/35/EU, EMC-directive (2014/30/EU) machine directive 2006/42/EC (NS-EN ISO 12100:2010 2014/30/EU).

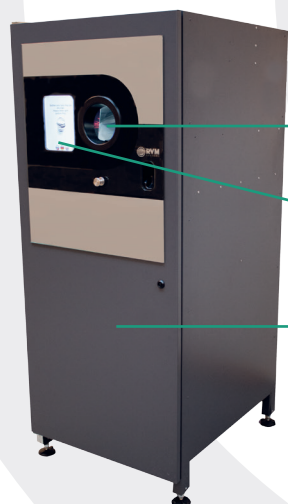

360° barcode reading.
No rotation needed.
The quickest in it's class!

10.4" LCD Display
with touch.

Bins for PET and cans.

